

# iMiniPlus PDF


---

DATA SHEET

The iMiniPlus PDF data logger generates a comprehensive PDF report without the need for proprietary software, making data retrieval faster and more convenient.

## Features

- No proprietary software required; only a PDF reader
- Data can be downloaded to PC with mini USB cable (included)
- Large LCD display with multi-functional viewing
- Advanced multiple alarm settings
- Bookmarking & continuous logging features
- Customizable PDF reports
- Restart feature by START button

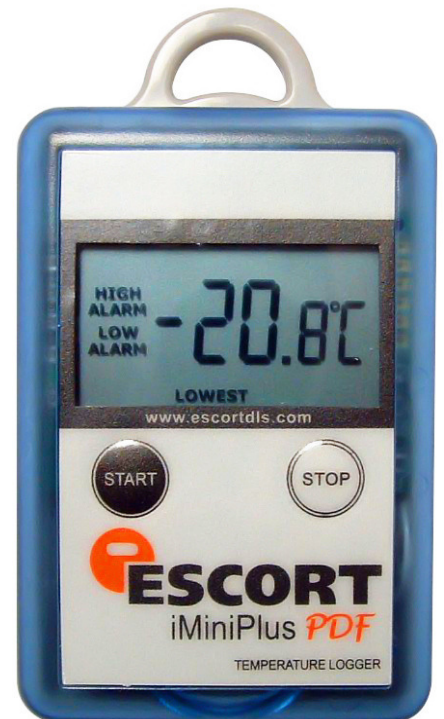

## Description

Product Code

Memory Options

Program Interval

Time Accuracy

Sensors

Temperature Range

Temperature Accuracy

Resolution

Sensor Response Time

LCD Operating Range

Alarm Thresholds

Alarm Configuration

Bookmark

Preprogram Option

Start Option

Auto Restart

Start Delay

Stop Option

Size

Weight

Case Material

Battery

IP Rating

Warranty

Calibration

Accuracy Certificate

Other Certification

Battery Life

Interface

Software

Default File Format

Data Export

Security

## Specifications

MU-IN-D-16-L (Internal sensor)

MU-OE-D-16-L (External sensor)

MU-ST-D-8-L (Single trip internal sensor)

Multi use – 16K; 16240 readings

Single trip – 8K; 8048 readings

5 seconds to 18 hours

±1 minute per month

Multi use – Internal and / or External

Single trip – Internal only

-40 °C to +70 °C (-40 °F to +158 °F)

±0.5 °C (-40 °C to -10 °C), ±1 °F (-40 °F to +14 °F)

±0.3 °C (-10 °C to +70 °C), ±0.6 °F (+14 °F to +158 °F)

0.1 °C (0.1 °F)

Internal Sensor – T90 of 20 minutes in moving air

External Sensor – T90 of 5 minutes in moving air

-20 °C to +70 °C (-4 °F to +158 °F)

Two

High & low

Yes

User programmable

Preprogramming available

Push button and/or timer

Yes; on multi-use loggers

Yes

Yes, Stop button (can be disabled)

83 x 57 x 17mm (excluding lug)

70 grams (including battery)

Polycarbonate/ABS

3.0V, user replaceable

IP65 (with plastic cap over USB connector)

24 months, excluding battery (Multi use loggers)

One Trip, excluding battery (Single trip loggers)

NIST Traceable upon request

Yes

ISO9001:2008, CE, RoHS, EN12830

1-2 years (depending on usage)

USB (included)


Console Pro

PDF & LRF

TXT, CSV, SYLK & LCF

Password protected

(programmable using Console Pro Software) encrypted binary file is generated along with PDF

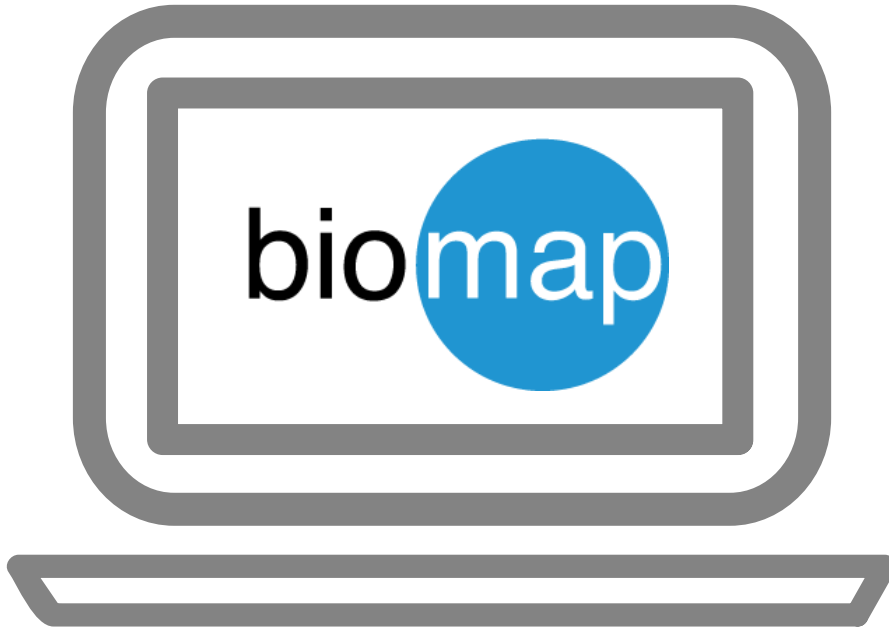

Visit [www.biomap.co.uk](http://www.biomap.co.uk) for more information and to get a personalised quote